

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 April 2002 (18.04.2002)

PCT

(10) International Publication Number
WO 02/31775 A2

(51) International Patent Classification⁷: **G06T 15/00**

Selim Ragip Emec. Sk. 13/4, Sauduiye, 81070 Istanbul (TR).

(21) International Application Number: **PCT/IB01/02735**

(81) Designated State (*national*): JP.

(22) International Filing Date: 9 October 2001 (09.10.2001)

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(25) Filing Language: English

(26) Publication Language: English

Published:

— without international search report and to be republished upon receipt of that report

(30) Priority Data:
09/689,566 12 October 2000 (12.10.2000) US

(71) Applicant and

(72) Inventor: ERDEM, Tanju, A. [TR/TR]; Momentum A.S.,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 02/31775 A2

(54) Title: METHOD FOR ANIMATING A 3-D MODEL OF A FACE

(57) Abstract: A method for animating a 3-D model of a person's face is disclosed. The 3-D face model carries both the geometry (shape) and the texture (color characteristics of the person's face). The shape of the face model is represented via a 3-D triangular mesh (geometry mesh), while the texture of the face model is represented via a 2-D composite image (texture image). A separate 3-D triangular mesh, called the shape mesh, is used to animate the nodes of the geometry mesh: Each triangle of the shape mesh controls the motion of a plurality of nodes of the geometry mesh that are connected to it. Thus, by moving the nodes of the shape mesh, which are small in number, the nodes of the geometry mesh, which can be very large in number, are animated realistically. The nodes of the shape mesh can be moved directly or indirectly. In the indirect method, the nodes of the shape mesh are moved in accordance with the so-called facial action values, which are even smaller in number than the nodes of the shape mesh.

METHOD FOR ANIMATING A 3-D MODEL OF A FACE

5

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Patent Application Serial No. 09/689,566, filed October 12, 2000 (Attorney Docket No. 89589.112900).

10

FIELD OF THE INVENTION

The present invention is related to the field of computer animation, and more specifically, to a technique for animating a personalized three-dimensional (3-D) model of a person's face in accordance with the facial motion of the person.

15

BACKGROUND OF THE INVENTION

The goal of facial animation is to mimic the facial motion of a person on a 3-D model of the person's face as accurately and as fast as possible. The accuracy of a facial animation method is measured by the realism of the animated face it generates. On the other hand, the computational speed of a facial animation method determines whether it can be realized in real-time.

20

The 3-D model of a person's face is composed of a 3-D triangular mesh, referred to as the geometry mesh, and an associated composite image of the person's face, referred to as the texture image. A 3-D triangular mesh refers to a connected set of triangular patches in 3-D whose corners form the nodes of the mesh. Each triangular patch in the geometry mesh acquires its image data from an associated triangular region in the texture image. The geometry mesh represents the geometry of the person's face in its neutral state. Animating the 3-D face model of a person involves deforming the geometry mesh of the face model to reflect the changes in the geometry of the face caused by the motion of the face.

25

The methods disclosed in the prior art on facial animation can be generally classified as (i) physics-based methods and (ii) rule-based methods. In physics-based methods, the motion of each triangle of the geometry mesh is controlled by a multi-layer facial muscle system. Dynamic models of the facial muscles are employed to calculate the propagation of any facial force throughout the face and to obtain the resulting deformation of the surface of the face. Physics-based methods can produce realistic

30

35

animations, however, because of their high computational cost, they cannot be used in real-time applications.

In rule-based methods, a subset of the nodes of the geometry mesh, referred to as feature points, are used to control the movement of the rest of the nodes of the geometry mesh. Each feature point is assigned an area of influence on the geometry mesh. When a feature point is moved, the nodes of the geometry mesh that belong to the area of influence of the feature point move according to some predefined deformation rules. These deformation rules may specify linear, piece-wise linear, or rotational motion for the nodes of the mesh with the amount of motion being inversely proportional to the distance of the node to its controlling feature point. Although the rule-based methods provide real-time deformations of the face, they may lack realism as they are not based on any physical model.

SUMMARY OF THE INVENTION

The present invention provides an improvement designed to satisfy the aforementioned needs. Particularly, the present invention is directed to a computer program product for animating a 3-D face model realistically and in real-time by performing the steps of: (a) receiving the 3-D face model of a person; (b) receiving the global and local facial motion values; and (c) animating the fine geometry mesh of the 3-D face model using a sparse shape mesh overlaying the geometry mesh.

BRIEF DESCRIPTION OF THE DRAWINGS

In the course of the following detailed description, reference will be made to the attached drawings in which:

FIG. 1 is a perspective view of a computer system for implementing the present invention;

FIG. 2 is a diagram illustrating the method of present invention;

FIG. 3 is a flowchart for the method of the present invention;

FIG. 4 is a diagram illustrating the method of receiving the geometry data set;

FIG. 5 is a diagram further illustrating the method of receiving the geometry data set;

FIG. 6 is a diagram illustrating the action faces used for animation;

FIG. 7 is a diagram illustrating the method of attaching the geometry mesh to the shape mesh.

FIG. 8 is a diagram illustrating the method of animating the face using the shape mesh.

DETAILED DESCRIPTION OF THE INVENTION

5 Referring to FIG. 1, there is illustrated a computer system 10 for implementing the present invention. The computer system 10 includes a microprocessor-based unit 12 for receiving and processing software programs and for performing other well known processing functions. The software programs are contained on a computer useable medium 14, typically a compact disk, and are input into the microprocessor-based unit 12 via the compact disk player 16 electronically connected to the microprocessor-based unit 12. As an alternate to using the compact disk 14, programs could also be contained in an Internet server 18 and input into the microprocessor-based unit 12 via an Internet connection 20. A camera 22 is electronically connected to the microprocessor-based unit 12 to capture the 2-D images of a person's face. A display 24 is electronically connected to the microprocessor-based unit 12 for displaying the images and user related information associated with the software. A keyboard 26 is connected to the microprocessor based unit 12 for allowing a user to input information to the software. A mouse 28 is also connected to the microprocessor based unit 12 for selecting items on the display 24 or for entering 2-D position information to the software, as is well known in the art. As an alternate to using the mouse 28, a digital pen 30 and a digital pad 32 may be used for selecting items on the display 24 and entering position information to the software. The output of the computer system is either stored on a hard disk 34 connected to the microprocessor unit 12, or uploaded to the Internet server 18 via the Internet connection 20. Alternatively, the output of the computer system can be stored on another computer useable medium 14, typically a compact disk, via a compact disk writer 36.

The below-described steps of the present invention are implemented on the computer system 10. Before describing the steps of the present invention, it will facilitate understanding to have an understanding of the following terms. Referring to FIG. 2, 3-D face model is composed of a 3-D triangular mesh (geometry mesh) 41 and a 2-D composite image (texture image) 42. 3-D triangular mesh refers to a connected set of triangular patches in 3-D whose corners form the nodes of the mesh. Each triangular patch 43 in the geometry mesh 41 is associated with a triangular region 44 in the texture image 42. In order to render the face model of a person on the display 24 of the computer system 10, the outside surface of each triangular patch 43 in the geometry mesh 41 is

5 painted with the image data contained in its corresponding triangle 44 in the texture image 42. Image data are transferred from a triangle 44 in the texture image 42 to its counterpart 43 in the geometry mesh 41 via an affine transform which is well known to anyone knowledgeable in the field of computer graphics. Although we have disclosed triangular meshes, those skilled in the art will understand that any other polygonal mesh could be substituted for the triangular mesh.

10 Referring to FIG. 3, there are illustrated the five steps of the present invention which are first succinctly outlined and later described in detail. Briefly stated, the four steps are as follows: (a) receiving the 3-D face model of a person (Step 120); (b) receiving the global and local facial motion values (Step 130); (c) animating the 3-D face model using the shape mesh and the facial motion values (Step 140); (d) displaying the animated 3-D face model (Step 150).

15 A. Receiving The 3-D Face Model (Step 120)

Referring to FIG. 3, the method of receiving the 3-D face model of the person comprises the steps of (1) receiving the geometry data set (Step 121); (2) receiving the texture image (Step 122); and (3) receiving any synthetic facial objects (Step 123). In the following, a detailed description of these steps is given

20 A1. Receiving The Geometry Data Set (Step 121)

25 The geometry data set for a 3-D face model consists of an initial geometry mesh, a shape mesh, the positions of the nodes of the shape mesh for the neutral state and the action states of the face, and the attachment coefficients for the geometry mesh. An itemized description of the aforementioned components of the geometry data set is given in the following:

- 30 1. Initial geometry mesh: Referring to FIG. 4, the topology of the geometry mesh 271 is received as part of the geometry data set. Hence, what is received as the first item is the number of nodes and triangles of the geometry mesh 271, and the information of how they are connected.

2. Shape meshes for the neutral and action faces: Referring to FIG. 5, the shape mesh 275 is a lower resolution (coarser) triangular mesh overlying the geometry mesh 271 and comprising substantially fewer and larger triangular patches than the geometry mesh 271. The shape mesh 275 is used for setting the coordinates of the nodes of the geometry mesh 271 for the neutral face. The shape mesh 275 is also used for animating the geometry mesh 271 in accordance with the motion values. Neutral face means that all face muscles are relaxed, eyes are normally open, mouth is closed and lips are in contact. Action faces refer to maximum motions of regions of the face such as during smiling or being surprised.

Referring to FIG. 6, in a preferred embodiment of the invention there are a total of 5 action states for the face, namely, yawning-mouth 241, smiling-mouth 243, kissing-mouth 245, raised-eyebrows 247, and squeezed-eyebrows 249, in addition to the neutral state 221 of the face. In mathematical terms, let K denote the number of nodes of the shape mesh 275 and let D_n , $n = 1, \dots, K$, denote the positions of the nodes of the shape mesh 275 for the neutral face 221. Let H denote the number of action faces and $D_{n,i}$, $i = 1, \dots, H$, denote the positions of the nodes of the shape mesh 275 for the action faces. Hence, what is received in the second step as part of the geometry data set is the topology of the shape mesh 275 and the coordinates of the nodes of the shape mesh for the neutral face D_n , $n = 1, \dots, K$, and optionally for the action faces $D_{n,i}$, $i = 1, \dots, H$.

3. Attachment coefficients: Referring to FIGS. 4 and 7, the attachment coefficients are used to attach the geometry mesh 271 to the shape mesh 275 to obtain the geometry mesh 273 adapted for the person. The attachment method is such that a node 280 of the geometry mesh 273 is attached to a triangle 281 of the shape mesh 275 if there is a point on the triangle 281 such that the line passing through the node 280 and the point is parallel to the surface normal vector n_p at the point. Still referring to FIG. 7, the node 280 of the geometry mesh 273 located at Q is attached to the triangle 281 of the

shape mesh 275 because the line passing through Q and P is parallel to n_P . Then, it is said that the node Q 280 is attached to the triangle ABC 281 at the point P . This attachment is quantified by five numbers, namely the weights α , β , γ , the distance d between the node Q 280 and the attachment point P , and the index m of the triangle 281. Hence α , β , γ , d , and m are referred to as the attachment coefficients. The 3-D position of the node Q 280 is expressed as

$$Q = \alpha A + \beta B + \gamma C + dn$$

where A , B , and C denote the positions of the corners of the triangle 281, and n is obtained as a normalized weighted average of the normal vectors n_A , n_B and n_C at the corners A , B , and C , respectively, of the shape triangle 281 as follows:

$$n = \frac{\alpha n_A + \beta n_B + \gamma n_C}{\|\alpha n_A + \beta n_B + \gamma n_C\|}$$

A different set of attachment coefficients is received for each node of the geometry mesh 273 as part of the geometry data set. In mathematical terms, let L denote the number of nodes in the geometry mesh 271. Then, the attachment coefficients are denoted by α_k , β_k , γ_k , d_k , and m_k for $k = 1, \dots, L$. Hence what is received in the third step is the attachment coefficients α_k , β_k , γ_k , d_k , and m_k for the nodes of the geometry mesh 273.

A2. Receiving The Texture Image (Step 122)

The texture image is used to paint the surface of the geometry mesh of the person. The texture image may consist of a single image, a mosaic of multiple images, or simply a concatenation of multiple images. Associated with the texture image, affine transformations are also received for every triangle of the geometry mesh 273. The affine transformations are used to map the texture image data onto the triangles of the geometry mesh 273 as is well known to anyone in the field of computer graphics.

A3. Receiving Any Synthetic Facial Objects (Step 123)

The face model may include synthetic objects such as eyeglasses and earrings. A
 5 3-D mesh model of a pair of eyeglasses is selected from a collection of eyeglasses as
 indicated by an eyeglasses identifier, if the face model includes eyeglasses. Similarly, a 3-
 D mesh model of a pair of earrings is selected from a collection of earrings as indicated
 by an earrings identifier, if the face model includes earrings. The 3-D meshes of the
 synthetic components are attached to the geometry mesh of the face to obtain the
 10 complete face model of the person.

B. Receiving The Global And Local Facial Motion Values (Step 130)

15 Referring to FIG. 3, in the third step of the invention, the global and local motion
 values for animating the 3-D face model are received in a chronological order. The global
 motion is represented by the 3-D rotation matrix R^f and the 3-D position vector T^f . The
 superscript f denotes the chronological order number for the motion values.

20 The local motion is represented by the 3-D position values D_n^f , $n = 1, \dots, K$, of the
 nodes of the shape mesh 275. The superscript f denotes the chronological order number
 for the position values, and K denotes the number of nodes in the shape mesh 275. The
 position values D_n^f are either received directly or indirectly. In the indirect method, the
 action vectors A^f are received instead, and the position values are calculated from the
 25 action vectors using the following matrix-vector equation:

$$D_n^f = [D_{n,1} - D_n \quad \dots \quad D_{n,H} - D_n] \cdot A^f + D_n,$$

where D_n denotes the positions of the nodes of the shape mesh 275 for the neutral face
 30 221, and $D_{n,i}$ for $i = 1, \dots, H$, denote the positions of the nodes of the shape mesh 275 for
 the action faces. It facilitates understanding to note that the matrix in the equation above
 has dimension $K \times H$.

In a preferred embodiment of the invention, there are a total of 5 action faces, i.e., $H = 5$, and $D_{n,1}, D_{n,2}, D_{n,3}, D_{n,4}$, and $D_{n,5}$ for $n = 1, \dots, K$ denote the positions of the nodes of the shape mesh 275 for the action faces yawning-mouth 241, smiling-mouth 243, kissing-mouth 245, raised-eyebrows 247, and squeezed-eyebrows 249, respectively. Likewise, the action vector A has 5 components:

$$A = (A_{MY}, A_{MS}, A_{MK}, A_{ER}, A_{ES})$$

A_{MY} being the amount of yawning-mouth action, A_{MS} being the amount of smiling-mouth action, A_{MK} being the amount of kissing-mouth action, A_{ER} being the amount of raised-eyebrows action, and A_{ES} being the amount of squeezed-eyebrows action. For example, action state $i=1$ corresponds to yawning-mouth and has action vector $A = (1.0, 0.0, 0.0, 0.0, 0.0)$, action state $i=4$ corresponds to raised-eyebrows and has action vector $A = (0.0, 0.0, 0.0, 0.0, 1.0)$, and action vector $A = (0.5, 0.0, 0.0, 1.0, 0.0)$ represents a half-yawning mouth and fully raised eyebrows. Still referring to FIG. 7, the neutral state of the face 221 is represented by the action vector $A = (0.0, 0.0, 0.0, 0.0, 0.0)$.

C. Animating The 3-D Face Model (Step 140)

Referring to FIG. 3, the method of animating the 3-D face model comprises the steps of (1) locally deforming the 3-D face model using the shape mesh in accordance with the local facial motion (Step 141); and (2) globally moving the deformed 3-D face model in accordance with the global facial motion (Step 142). In the following, a detailed description of these steps is given.

D1. Locally Deforming The 3-D Face Model Using The Shape Mesh In Accordance With The Local Facial Motion (Step 141)

Referring to FIG. 8, given the received attachment coefficients $\alpha_k, \beta_k, \gamma_k, d_k$, and m_k for $k = 1, \dots, L$, for the nodes of the geometry mesh 273, and the moved 3-D

position values D_n^f , $n = 1, \dots, K$, of the nodes of the shape mesh 275 in the chronological order, the following procedure is used to animate the adapted geometry mesh 273:

1. Calculate the normal vectors at the nodes of the shape mesh 275: Still referring to FIG. 8, the normal vector n at a node of the shape mesh 275 is obtained by averaging the surface normals of all the triangles of the shape mesh 275 that have the node as one of their corners. The result of the averaging is normalized so that the normal vector n has unit length.
2. Calculate the animated 3-D positions of the nodes of the geometry mesh 273: Still referring to FIG. 8, the location P on the triangle 281 where the node 280 is attached to is calculated as follows. Let $a(m_k)$, $b(m_k)$, and $c(m_k)$ denote the indices of the nodes of the triangle of the shape mesh 275 indicated by the index m_k . Likewise, let A_k^f , B_k^f , and C_k^f denote the 3-D positions and let u_k , v_k , and w_k denote the normal vectors of the nodes of the triangle of the shape mesh 275 indicated by the index m_k . Hence, the following equations can be written:

$$A_k^f = D_{a(m_k)}^f, \quad B_k^f = D_{b(m_k)}^f, \quad \text{and} \quad C_k^f = D_{c(m_k)}^f;$$

$$n_k = \frac{\alpha_k u_k + \beta_k v_k + \gamma_k w_k}{\|\alpha_k u_k + \beta_k v_k + \gamma_k w_k\|}.$$

Then, the locally animated location Q_k for the geometry node k is given by

$$Q_k = \alpha_k A_k^f + \beta_k B_k^f + \gamma_k C_k^f + d_k n_k.$$

D2. Globally Moving The Deformed 3-D Face Model In Accordance With The Global Facial Motion (Step 142)

Once the local deformations are realized on the geometry mesh 273, it is rotated according to the 3-D rotation matrix R^f and positioned according to the 3-D position vector T^f . Thus the globally and locally animated location S_k for the geometry node k is given by

5
$$S_k = R^f Q_k + T^f .$$

D. Displaying The Animated 3-D Face Model (Step 150).

10 The animated 3-D face model is obtained by painting the animated geometry mesh obtained in Step 140 with the received texture image and affine mapping data, and adding the received synthetic facial objects such as eyeglasses and earrings, if any. The animated 3-D face model of a person is displayed on the monitor 24 of the computer system 10 for being viewed by the same and/or other persons.

15

20

25

30

What is claimed is:

1. A method for controlling a first mesh representative of fine features of a face with a second mesh representative of coarse features of the face comprising the steps of:
5 attaching the fine mesh with a first set of nodes to the coarse mesh with a second set of nodes; and
 deforming the fine mesh using the coarse mesh.
2. The method of claim 1 further comprising:
10 receiving data signals representative of movements of the nodes of the coarse mesh;
 and
 moving the coarse mesh in accordance with the received data signals in order to animate the fine mesh.
- 15 3. A method for animating a 3-D face model comprising the steps of:
 providing a 3-D face model having a fine 3-D geometry mesh with a first set of nodes, a coarse 3-D shape mesh with a second set of nodes, and a set of five attachment coefficients for each node of the fine 3-D geometry mesh, the five coefficients including one coefficient for triangle index, three coefficients for
20 interpolation weights, and one coefficient for surface distance;
 attaching the fine geometry mesh to the coarse shape mesh in accordance with the attachment coefficients;
 receiving global and local motion values for deforming the 3-D shape mesh;
 animating the 3-D geometry mesh of the 3-D face model using the 3-D shape mesh in
25 accordance with the received global and local motion values; and
 displaying the animated 3-D face model.
4. The method of claim 3 wherein the step of attachment comprises:
 assigning each node of the geometry mesh to a triangle of the shape mesh indicated
30 by the triangle index coefficient for the node;
 obtaining an attachment point for the node of the geometry mesh on the assigned triangle of the shape mesh, where the attachment point is defined as a weighted average of the coordinates of the corners of the assigned triangle using the interpolation weights coefficients provided for the node;

calculating a surface normal of the shape mesh at the attachment point as a weighted average of the normal vectors at the corners of the assigned triangle using the interpolation weights coefficients provided for the node; and

5 obtaining the location of the node by adding to the attachment point a surface vector defined as the surface distance coefficient times the surface normal of the shape mesh at the attachment point.

10 5. The method of claim 3 wherein the global motion values comprise 3-D orientation and 3-D position data of the geometry mesh and the local motion values comprise 3-D displacements of the nodes of the shape mesh.

15 6. The method of claim 5 wherein the step of animating comprises moving nodes of the shape mesh in accordance with the received 3-D displacement data;
calculating surface normals of the shape mesh at attachment points of all nodes of the geometry mesh;
obtaining locations of the nodes of the geometry mesh by adding to their attachment points a surface vector defined as the surface distance coefficient times the surface
20 normal of the shape mesh at respective attachment point; and
rotating and positioning the geometry mesh in accordance with the received global orientation and position data.

25 7. The method of claim 3 wherein the global motion values comprise 3-D orientation and 3-D position data of the geometry mesh and the local motion values comprise action vectors for the shape mesh.

30 8. The method of claim 7 wherein the step of animating comprises:
calculating 3-D displacement data for the shape mesh in accordance with the received action vectors;
moving nodes of the shape mesh in accordance with the received 3-D displacement data;

calculating surface normals of the shape mesh at attachment points of all nodes of the geometry mesh;

obtaining locations of the nodes of the geometry mesh by adding to their attachment points a surface vector defined as the surface distance coefficient times the surface

5 normal of the shape mesh at respective attachment point; and

rotating and positioning the geometry mesh in accordance with the received global orientation and position data.

10

15

20

25

30

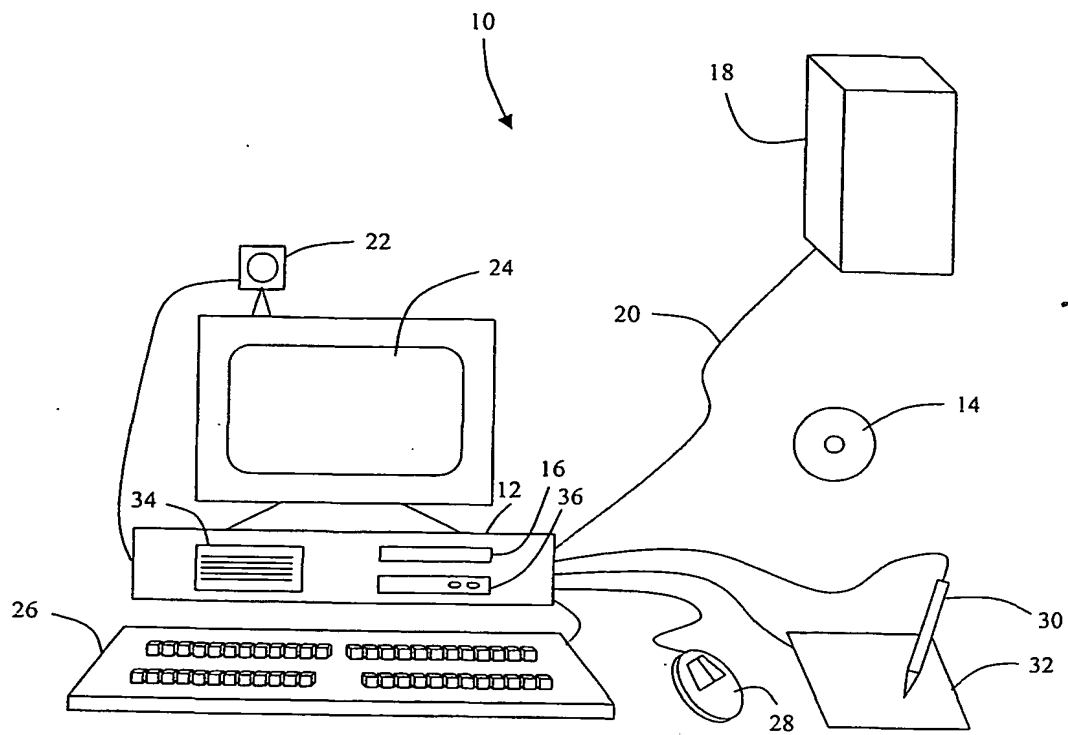


FIG. 1

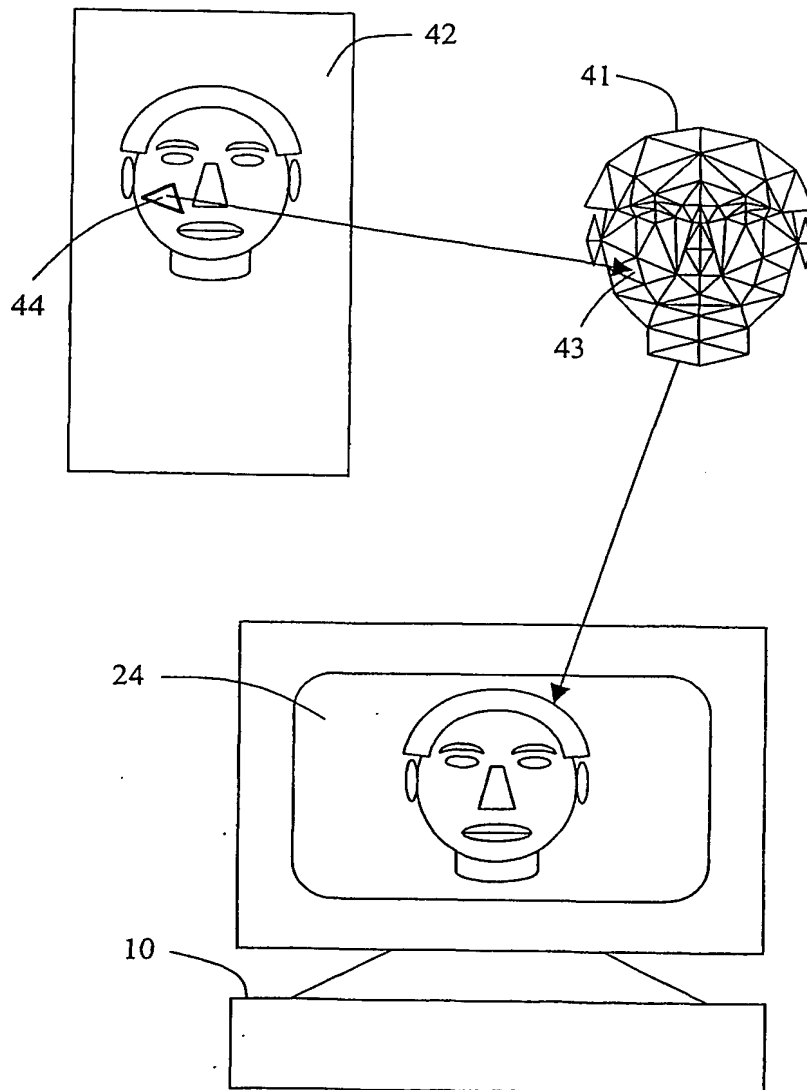


FIG. 2

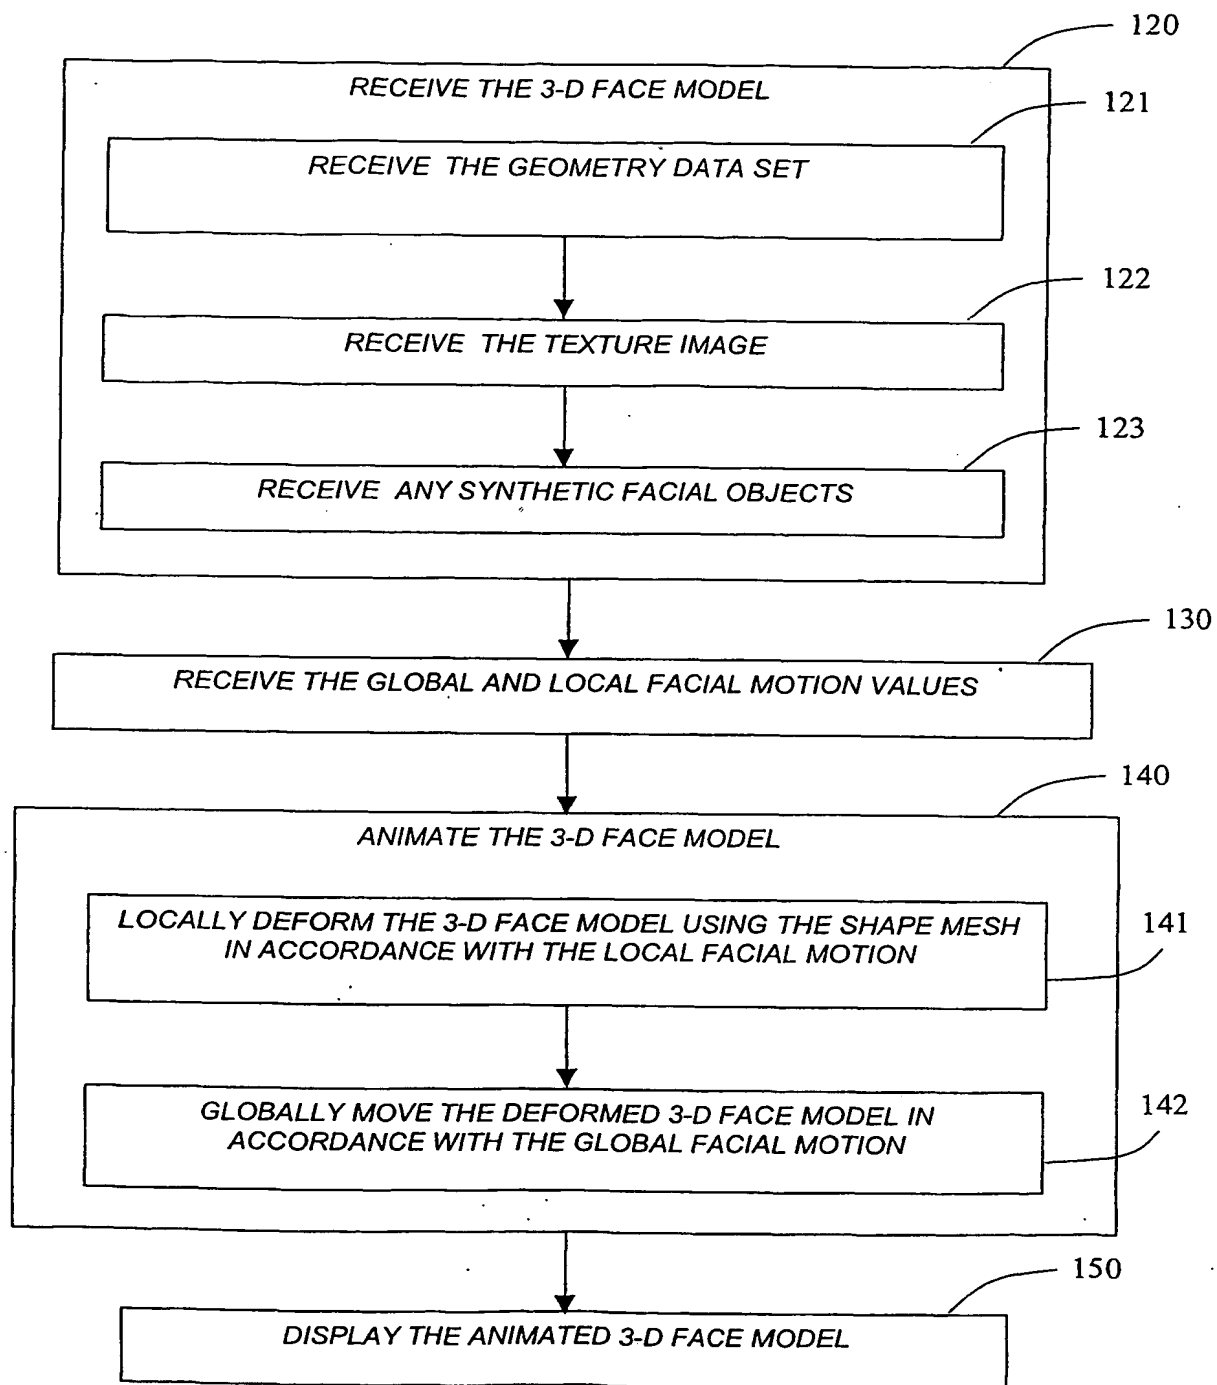


FIG. 3

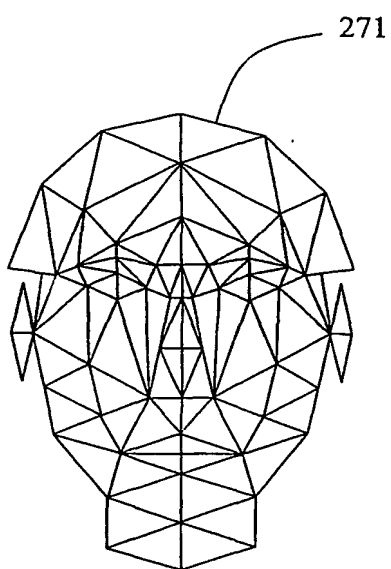


FIG. 4

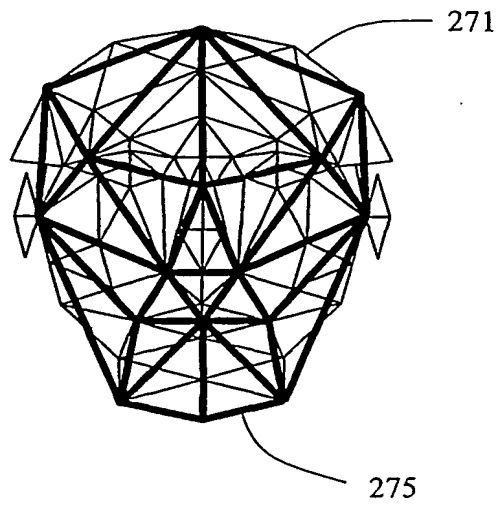


FIG. 5

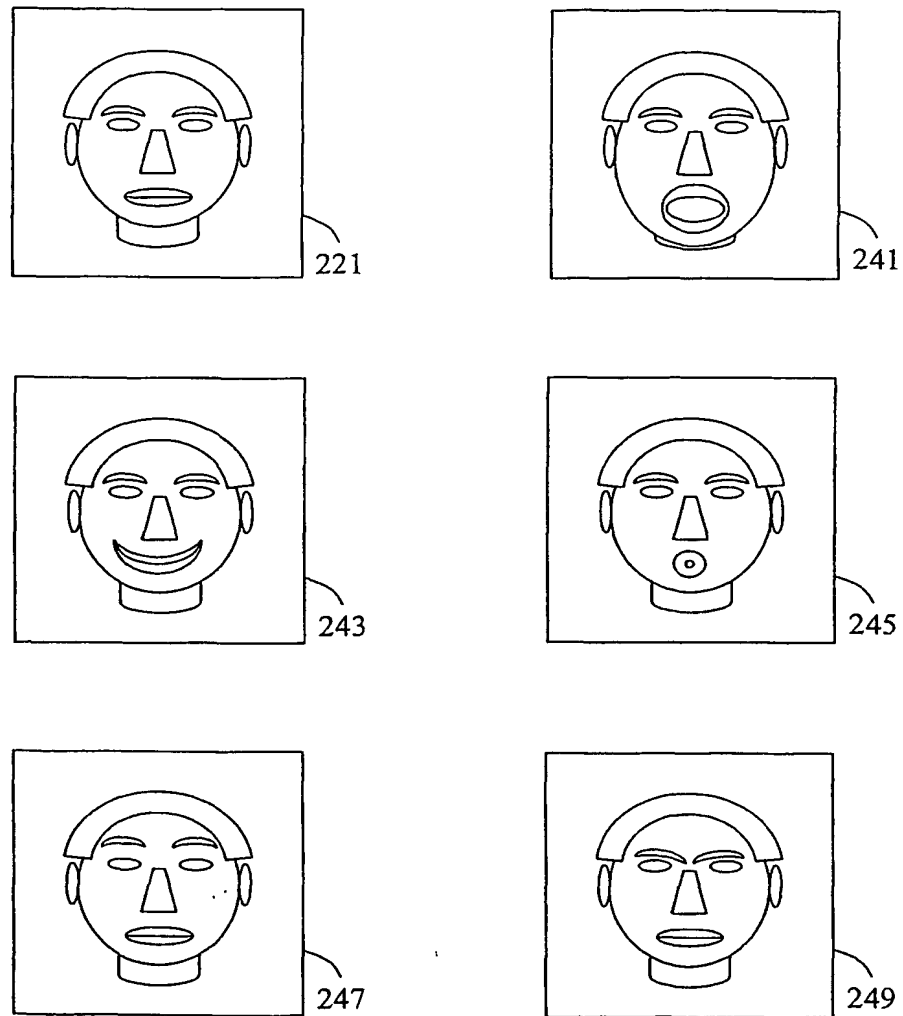


FIG. 6

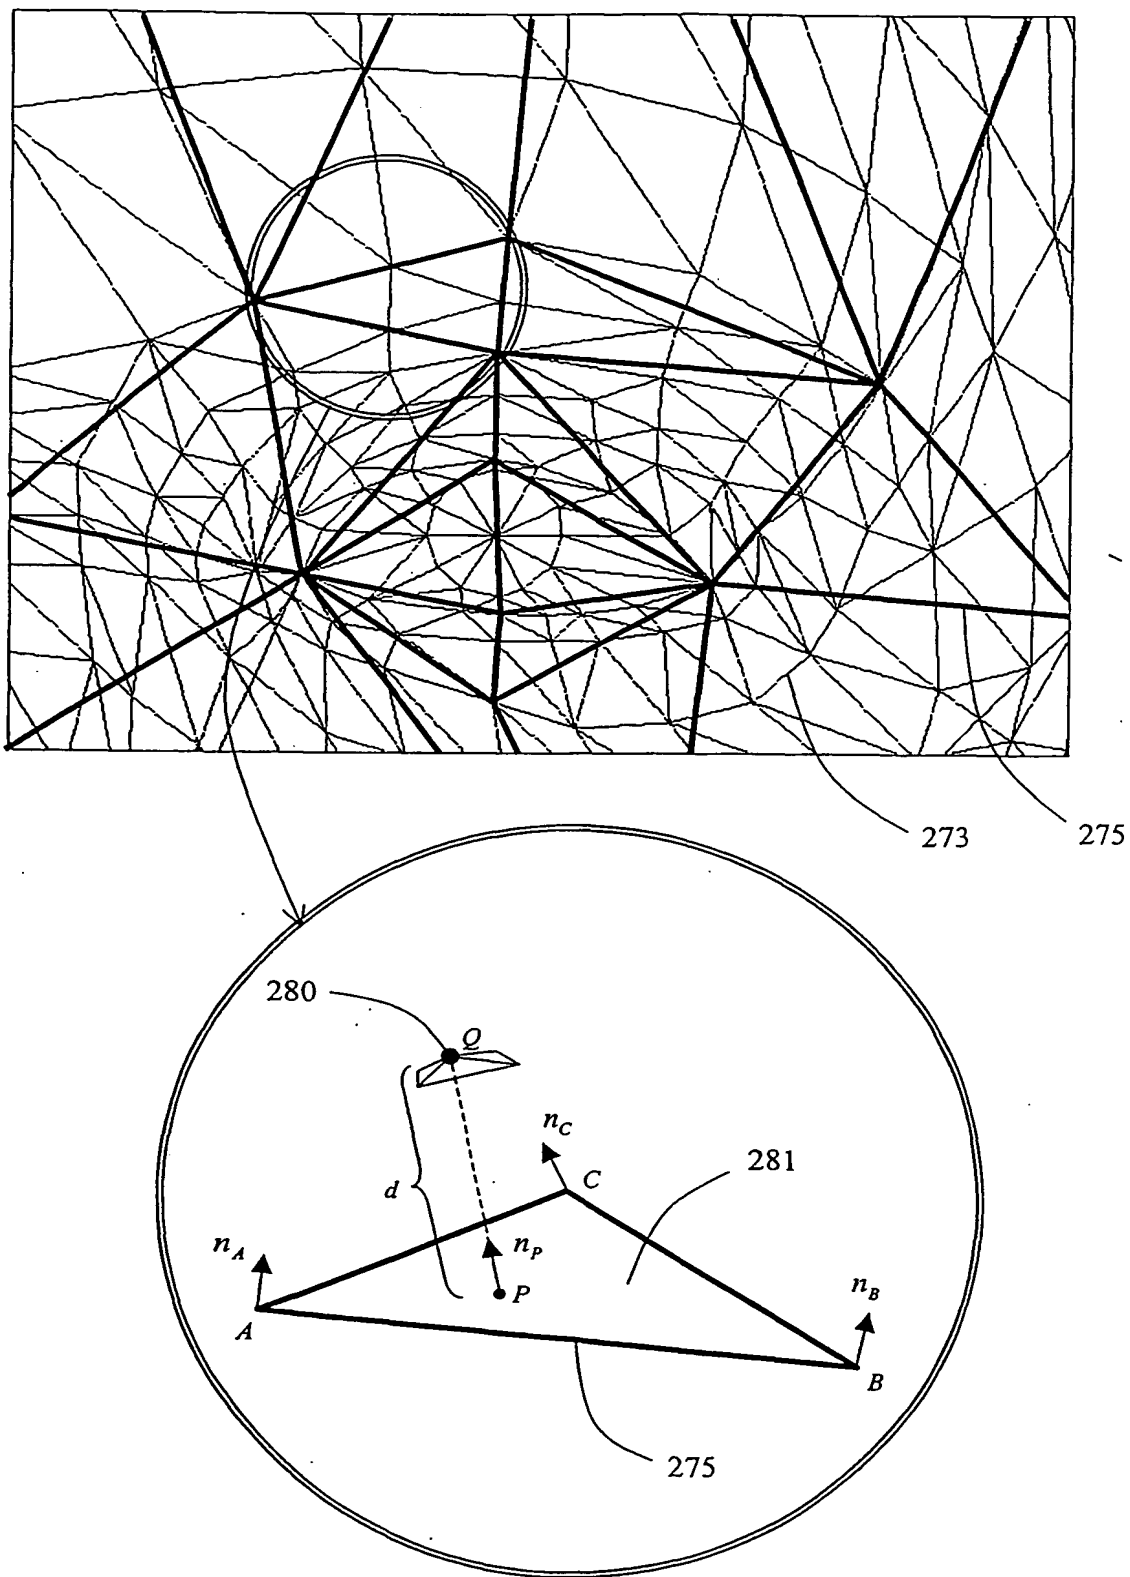


FIG. 7

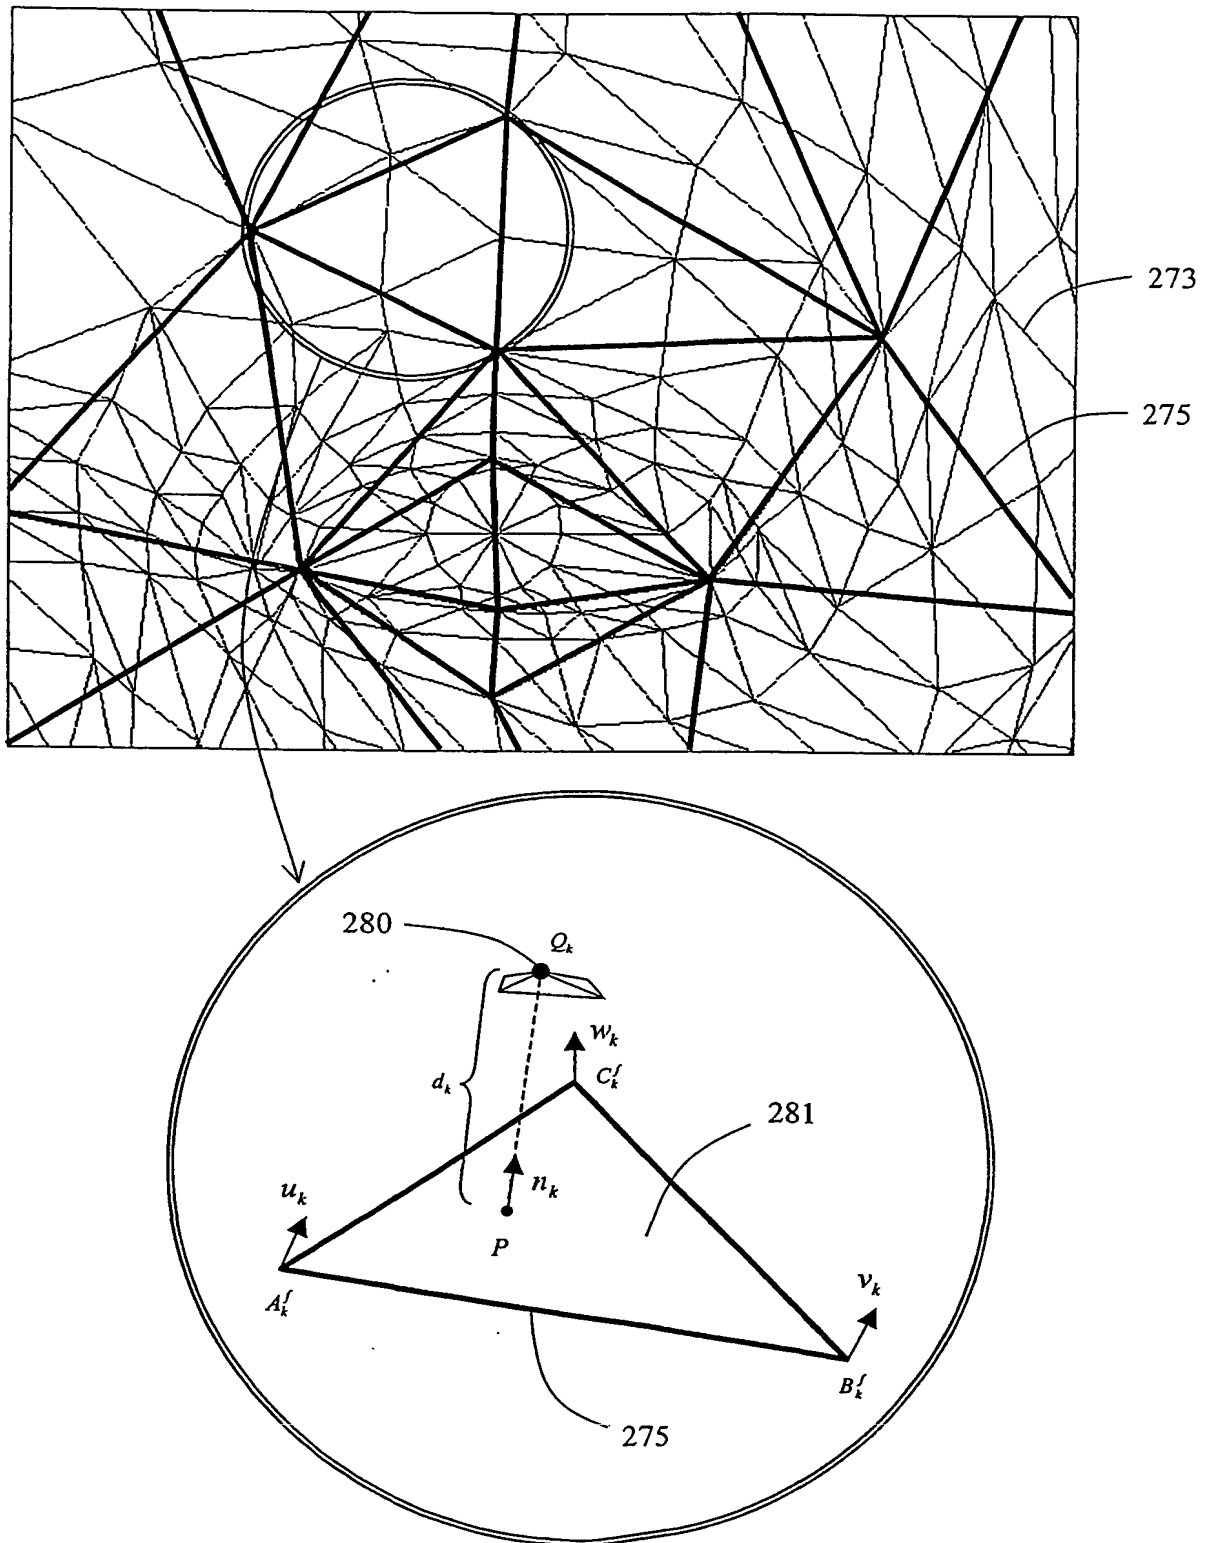


FIG. 8

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 April 2002 (18.04.2002)

PCT

(10) International Publication Number
WO 02/031775 A3

(51) International Patent Classification⁷:
G06T 15/70, 17/20

(81) Designated State (*national*): JP.

(21) International Application Number: PCT/IB01/02735

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(22) International Filing Date: 9 October 2001 (09.10.2001)

(25) Filing Language: English

Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(26) Publication Language: English

(30) Priority Data:
09/689,566 12 October 2000 (12.10.2000) US


(88) Date of publication of the international search report:
6 September 2002

(71) Applicant and

(72) Inventor: ERDEM, Tanju, A. [TR/TR]; Momentum A.S., Selim Ragip Emec. Sk. 13/4, Sauduiye, 81070 Istanbul (TR).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR THREE-DIMENSIONAL FACIAL ANIMATION

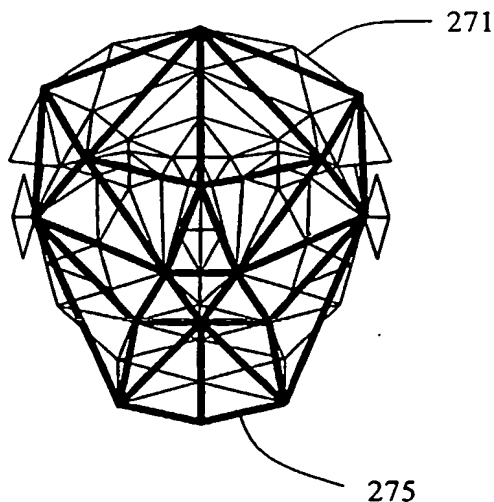

(57) Abstract: A method for animating a 3-D model of a person's face is disclosed. The 3-D face model carries both the geometry (shape) and the texture (color characteristics of the person's face). The shape of the face model is represented via a 3-D triangular mesh (geometry mesh), while the texture of the face model is represented via a 2-D composite image (texture image). A separate 3-D triangular mesh, called the shape mesh, is used to animate the nodes of the geometry mesh: Each triangle of the shape mesh controls the motion of a plurality of nodes of the geometry mesh that are connected to it. Thus, by moving the nodes of the shape mesh, which are small in number, the nodes of the geometry mesh, which can be very large in number, are animated realistically. The nodes of the shape mesh can be moved directly or indirectly. In the indirect method, the nodes of the shape mesh are moved in accordance with the so-called facial action values, which are even smaller in number than the nodes of the shape mesh.

WO 02/031775 A3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02735

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06T15/70 G06T17/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 06962 A (PIXAR ANIMATION STUDIOS) 11 February 1999 (1999-02-11)	1,2
A	page 6, line 9 -page 8, line 15 ---	3-8
X	EP 0 926 628 A (FUJITSU LTD) 30 June 1999 (1999-06-30)	1,2
A	paragraph '0010! - paragraph '0011! paragraph '0198! - paragraph '0205! --- -/--	3-8

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

21 June 2002

Date of mailing of the international search report

01/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zamuner, U

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 01/02735

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LAVAGETTO F ET AL: "THE FACIAL ANIMATION ENGINE: TOWARD A HIGH-LEVEL INTERFACE FOR THE DESIGN OF MPEG-4 COMPLIANT ANIMATED FACES" IEEE TRANSACTIONS ON CIRCUITS AND SYSTEMS FOR VIDEO TECHNOLOGY, IEEE INC. NEW YORK, US, vol. 9, no. 2, March 1999 (1999-03), pages 277-289, XP000805532 ISSN: 1051-8215	1,2
A	abstract page 278, left-hand column, line 11 - line 22 page 279, left-hand column, line 23 -page 282, left-hand column, line 39 ---	3-8
A	CHEN T: "Technologies for building networked collaborative environments" IMAGE PROCESSING, 1999. ICIP 99. PROCEEDINGS. 1999 INTERNATIONAL CONFERENCE ON KOBE, JAPAN 24-28 OCT. 1999, PISCATAWAY, NJ, USA, IEEE, US, 24 October 1999 (1999-10-24), pages 16-20, XP010368845 ISBN: 0-7803-5467-2 page 18, paragraph 2.3 -page 19, paragraph 2.4 ---	1-8
A	LI-AN TANG ET AL: "Analysis-based facial expression synthesis" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON IMAGE PROCESSING (ICIP) AUSTIN, NOV. 13 - 16, 1994, LOS ALAMITOS, IEEE COMP. SOC. PRESS, US, vol. 3 CONF. 1, 13 November 1994 (1994-11-13), pages 98-102, XP010146456 ISBN: 0-8186-6952-7 the whole document -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 01/02735

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9906962	A	11-02-1999	US 6300960 B1	09-10-2001
			AU 8759998 A	22-02-1999
			WO 9906962 A1	11-02-1999
			US 2001002131 A1	31-05-2001
EP 0926628	A	30-06-1999	JP 11185060 A	09-07-1999
			EP 0926628 A2	30-06-1999
			US 6307554 B1	23-10-2001

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ ~~SKewed/SLANTED IMAGES~~
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)